


BCK SERIES

INJECTION QUILL, NON-RETRACTABLE



SPECIFICATIONS

SAFETY RATING	150 PSI
CHECK VALVE	INTEGRATED SPRING LOADED BALL CHECK VALVE
SAF-T-SEAL TIP	N/A
QUICK DISCONNECT	YES
VALVE/PROCESS CONNECTION SIZE	1/2" (BCK-50) - 3/4" (BCK-75)
INLET CONNECTION SIZE	1/2"
SOLUTION TUBE SIZE	1/4"
SOLUTION TUBE ID	0.302"
SOLUTION TUBE OD	0.540"
(A) HOUSING LENGTH	6.35"
OVERALL LENGTH	A + INSERTION LENGTH

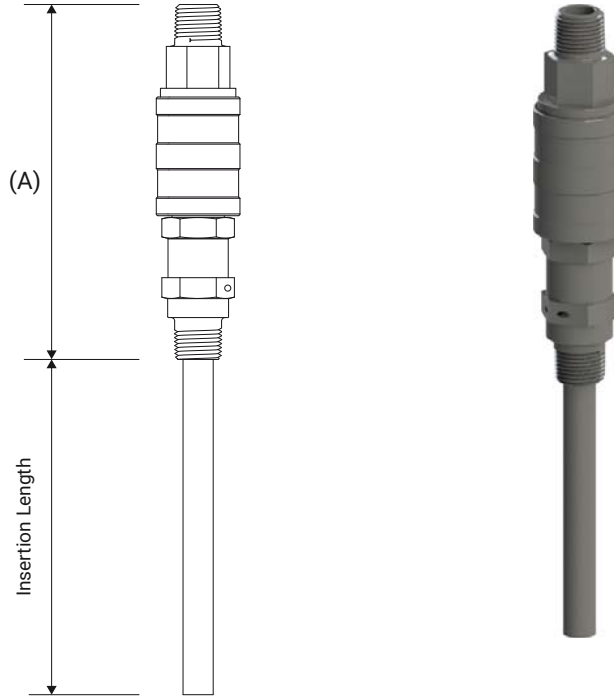

ORDERING INFORMATION

SERIES	SEAL TYPE	INLET CONNECTION	INSERTION LENGTH	BODY MATERIAL	SPRING MATERIAL
BCK-50	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	V = FKM E = EPDM	5 = 1/2"	2 = 2" 4 = 4" 6 = 6"	P = PVC	H = Alloy C276

TECH NOTES

1. Spring cracking pressure is 10 PSI.
2. PVC, CPVC and PVDF are not recommend nor covered by warranty when used in applications with process flow velocities greater than 6 fps.

SERIES	SEAL TYPE	INLET CONNECTION	INSERTION LENGTH	BODY MATERIAL	SPRING MATERIAL
BCK-75	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	V = FKM E = EPDM	5 = 1/2"	2 = 2" 4 = 4" 6 = 6"	P = PVC	H = Alloy C276



SAF-T-FLO Water Services, Inc. | www.saf

Please contact our Asia Pacific distributor:

H2O Rx

Phone: 0409 784 236 or 0421 795 353

info@h2orx.com.au

www.h2orx.com.au