



### Features

- SAF·T·FLO Retractable and Non-Retractable sampling probes are ideal for operators who want to obtain a sample away from the sidewall of a process pipe or water main.
- Non-Retractable sampling probes are cost efficient, compact, and easy to install.
- Sampling point location can be anywhere on the main or process pipe.
- Retractable sampling probes allow operators to withdraw or insert the probe when under system pressure.

Please contact our Asia Pacific distributor:




## H2O Rx

ABN: 97 217 924 685

Phone: 0409 784 236 [www.h2orx.com.au](http://www.h2orx.com.au)

Email: [info@h2orx.com.au](mailto:info@h2orx.com.au) PO Box 748, Lane Cove NSW 1595

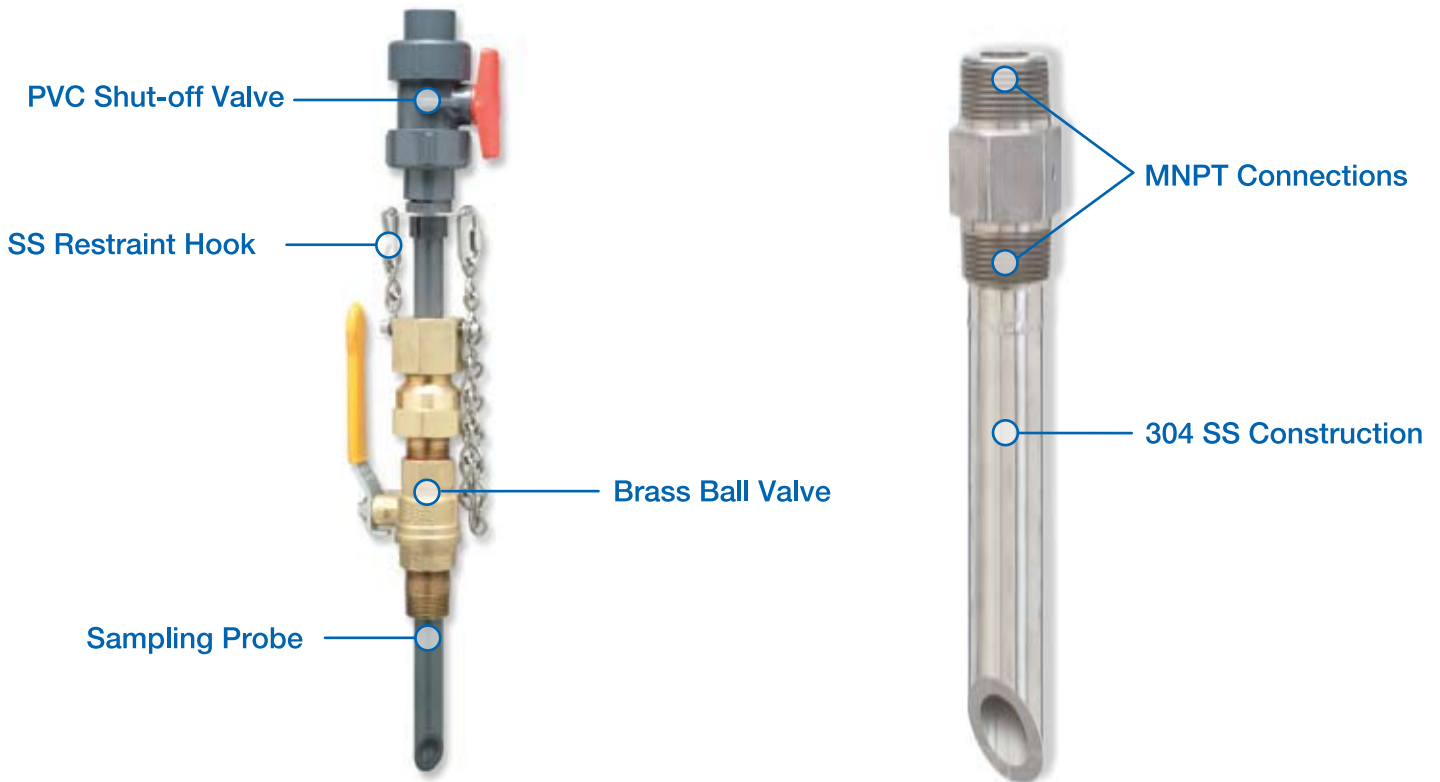

### Retractable

Main Conn. Size	Ball Valve	Max. Length	Probe Diameter	Shut-off Valve	Base Model Number
1/2" NPT	Brass	6"	1/4"	150 psi	EB-176
3/4" NPT	Brass	6"	3/8"	150 psi	EB-179

\* Max length is for PVC probes

#### Retractable Features

- 45 Degree Bevel Tip with alignment arrow
- Standard Shut-off Valve
- Stainless Steel, PVC, and CPVC Probe
- Stainless Steel Safety Chain & Restraint Hook
- Probe lengths can be over 6 inches (consult Saf-T-Flo)

#### Maintenance for Retractable Probes

- Periodically remove sampling probe from isolated process pipeline and inspect probe for any build-up or blockage.
- Apply o-ring grease to the compression o-ring.
- Apply anti-seize to threads of the compression gland.

### Non-Retractable

Main Conn. Size	Max. Length	Probe Diameter	Shut-off Valve	Base Model Number
1/2" NPT	6"	3/8"	Optional	EB-109
3/4" NPT	6"	1/2"	Optional	EB-108

#### Non-Retractable Features

- 45 Degree Bevel Tip with alignment indicator
- Optional Shut-off Valve
- Probe lengths can be over 6 inches (consult Saf-T-Flo)

#### Other Saf-T-Flo Models

- 150 psi. rated Retractable Injection Quills
- 250 psi. rated Retractable Injection Quills
- Non-Retractable Injection Quills
- Retractable Flanged Injectors
- All PVC Retractable Injection Quills

Please contact our Asia Pacific distributor:



## H2O Rx

ABN: 97 217 924 685

Phone: 0409 784 236 [www.h2orx.com.au](http://www.h2orx.com.au)

Email: [info@h2orx.com.au](mailto:info@h2orx.com.au) PO Box 748, Lane Cove NSW 1595