



Retractable
Flanged Injectors

Features

- SAF·T·FLO Retractable flanged injection quills are engineered for larger diameter and high velocity pipelines.
- Flanged injection quills require a flanged main connection. This connection must be the same size as the flanged ball valve.
- Flanged injectors can be built with various size flanges, therefore making adaptability to an existing flanged application possible.
- No shut down of the water main or process piping system is required when mounted to a flanged valve.



Please contact our Asia Pacific distributor:

H2O Rx


ABN: 97 217 924 685

Phone: 0409 784 236 www.h2orx.com.au

Email: info@h2orx.com.au PO Box 748, Lane Cove NSW 1595

150 psi. rated

250 psi. rated

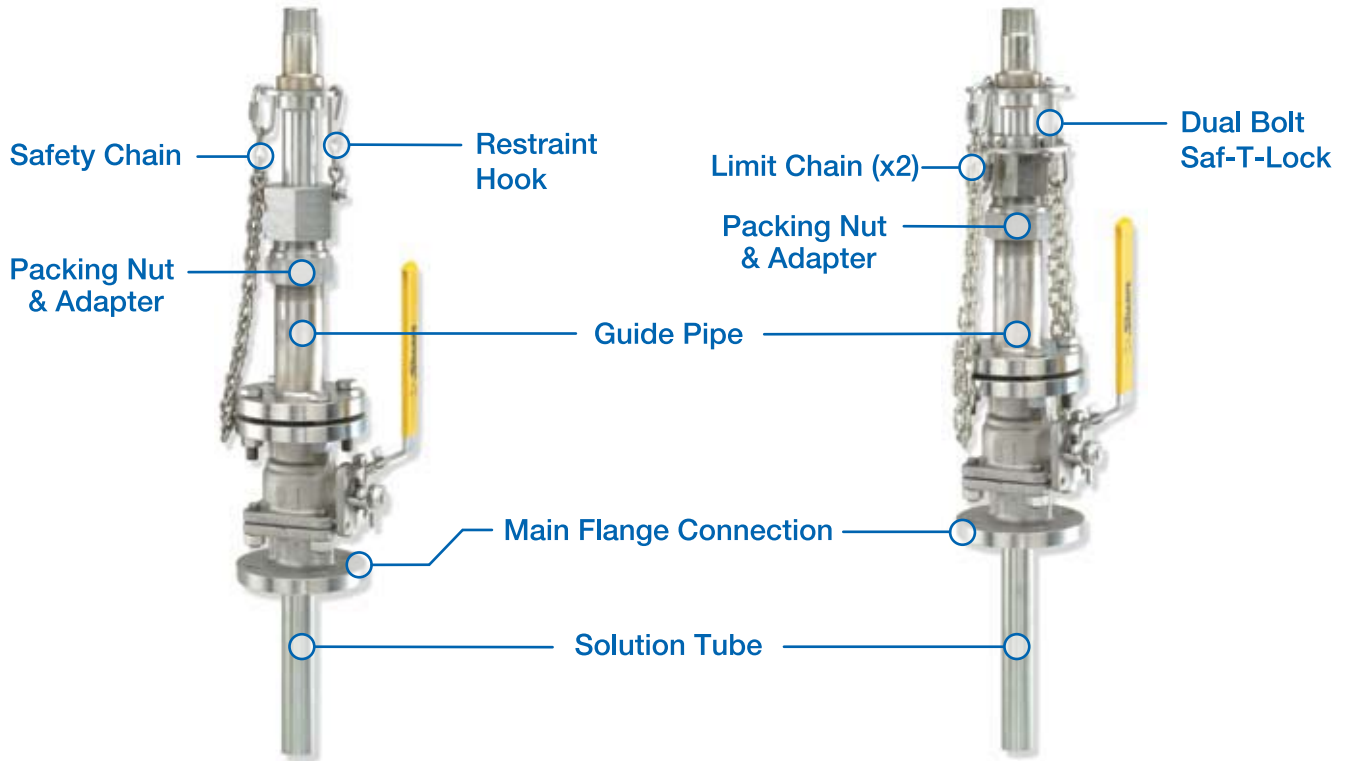

Retractable Flanged Injectors

Main Connection Flange Size (min. required)	Material of Construction	Solution Tube Diameter	Restraint Rating	Check Valve Available	Saf-T-Seal Tip Available	Base Model Number
3/4"	SS	3/8"	150 psi	Optional	Yes	EB-177
1"	SS	1/2"	150 psi	Optional	Yes	EB-181
1"	SS	1/2"	250 psi	Optional	Yes	EB-183
1-1/4"	SS	3/4"	250 psi	Optional	n/a	EB-188
1-1/2"	SS	1"	250 psi	Optional	n/a	EB-182
2"	SS	1-1/2"	250 psi	Optional	n/a	EB-184
2-1/2"	SS	2"	250 psi	Optional	n/a	EB-185
3"	SS	2-1/2"	250 psi	Optional	n/a	EB-186

Features

- 150# or 300# Flange
- Stainless Steel, A-20, Hastelloy C, and Titanium solution tubes available
- Preset Stainless Steel Limit Chain(s)
- Tip Configuration
 1. Plain Tip
 2. Bevel Tip with Alignment Arrow
 3. SAF-T-SEAL
- Diffuser (Optional)
- Check Valve (Optional)
- Lengths Over 6 Inches

Maintenance

- Periodically remove solution tube to check for internal or exterior chemical build-up
- Apply grease to the compression o-ring
- Re-apply Anti-Seize to Packing Nut & Adapter threads

Additional Saf-T-Flo Models

- 150 psi. rated Retractable Injection Quills
- 250 psi. rated Retractable Injection Quills
- All PVC Retractable Injection Quills
- Non-Retractable Injection Quills
- Sampling Probes

Please contact our Asia Pacific distributor:



H2O Rx

ABN: 97 217 924 685

Phone: 0409 784 236 www.h2orx.com.au

Email: info@h2orx.com.au PO Box 748, Lane Cove NSW 1595