

# EB-110

## Injection Quill, Non-Retractable, Basic 1/2" MNPT x 3/8" Solution Tube



### SPECIFICATIONS

SAFETY RATING  
1500 psi - PVC, CPVC, PVDF  
1500 psi - Alloy

CHECK VALVE  
NO

SAF-T-SEAL TIP  
OPTIONAL

QUICK DISCONNECT  
NO

VALVE/PROCESS CONNECTION SIZE  
1/2" MNPT

INLET CONNECTION SIZE  
1/2" MNPT


SOLUTION TUBE SIZE  
3/8"

SOLUTION TUBE ID  
(PVC, CPVC, & SAF-T-SEAL ALLOY)  
0.423"

SOLUTION TUBE ID  
(NON-SAF-T-SEAL ALLOY)  
0.493"

SOLUTION TUBE OD (ALL)  
0.675"

(A) OPERATING LENGTH  
2.25"

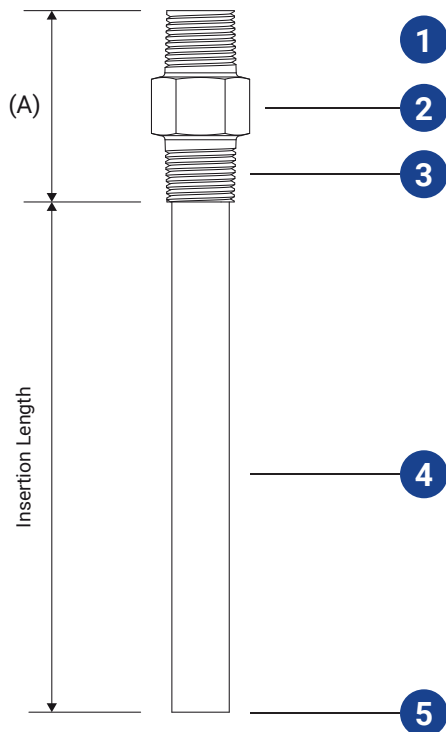

### ORDERING INFORMATION

#### PVC and CPVC

SERIES	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION
EB-110	<input type="text"/>	<input type="text"/>	<input type="text"/>
	P = PVC C = CPVC	2 = 2" 4 = 4" 6 = 6"	0 = Standard B = 45° Bevel CV = SAF-T-Seal, FKM CE = SAF-T-Seal, EPDM

#### PVDF

SERIES	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION
EB-110	<input type="text"/>	<input type="text"/>	<input type="text"/>
	K = PVDF	2 = 2" 4 = 4" 6 = 6"	0 = Standard B = 45° Bevel

#### ALLOY

SERIES	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION
EB-110	<input type="text"/>	<input type="text"/>	<input type="text"/>
	H = HASTELLOY C276 S = 316SS A = Alloy 20	2 = 2" 4 = 4" 6 = 6"	0 = Standard B = 45° Bevel CV = SAF-T-Seal, FKM CE = SAF-T-Seal, EPDM

- 1 Inlet Connection Thread
- 2 Installation Hex
- 3 Main Connection Thread
- 4 Solution Tube
- 5 Tip

