


EB-110

Injection Quill, Non-Retractable, Basic 1/2" MNPT x 3/8" Solution Tube



SPECIFICATIONS

SAFETY RATING	1500 psi - PVC, CPVC, PVDF 1500 psi - Alloy
CHECK VALVE	NO
SAF-T-SEAL TIP	OPTIONAL
QUICK DISCONNECT	NO
VALVE/PROCESS CONNECTION SIZE	1/2" MNPT
INLET CONNECTION SIZE	1/2" MNPT
SOLUTION TUBE SIZE	3/8"
SOLUTION TUBE ID (PVC, CPVC, & SAF-T-SEAL ALLOY)	0.423"
SOLUTION TUBE ID (NON-SAF-T-SEAL ALLOY)	0.493"
SOLUTION TUBE OD (ALL)	0.675"
(A) OPERATING LENGTH	2.25"

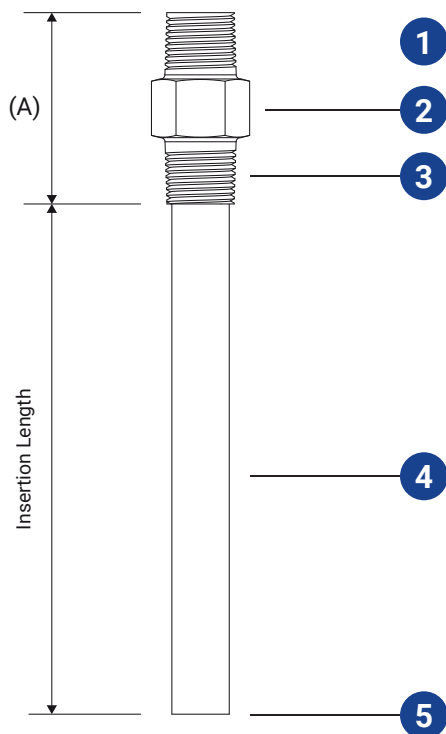

ORDERING INFORMATION

PVC and CPVC

SERIES	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION
EB-110	<input type="text"/>	<input type="text"/>	<input type="text"/>
	P = PVC C = CPVC	2 = 2" 4 = 4" 6 = 6"	0 = Standard B = 45° Bevel CV = SAF-T-Seal, FKM CE = SAF-T-Seal, EPDM

PVDF

SERIES	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION
EB-110	<input type="text"/>	<input type="text"/>	<input type="text"/>
	K = PVDF	2 = 2" 4 = 4" 6 = 6"	0 = Standard B = 45° Bevel

ALLOY

SERIES	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION
EB-110	<input type="text"/>	<input type="text"/>	<input type="text"/>
	H = HASTELLOY C276 S = 316SS A = Alloy 20	2 = 2" 4 = 4" 6 = 6"	0 = Standard B = 45° Bevel CV = SAF-T-Seal, FKM CE = SAF-T-Seal, EPDM

- 1 Inlet Connection Thread
- 2 Installation Hex
- 3 Main Connection Thread
- 4 Solution Tube
- 5 Tip



Please contact our Asia Pacific distributor:

H2O Rx

Phone: 0409 784 236 or 0421 795 353
info@h2orx.com.au

www.h2orx.com.au