

EB-111

Injection Quill, Non-Retractable, Basic 3/4" MNPT x 1/2" Solution Tube



SPECIFICATIONS

SAFETY RATING
150 psi - PVC, CPVC, PVDF
1500 psi - Alloy

CHECK VALVE
NO

SAF-T-SEAL TIP
OPTIONAL

QUICK DISCONNECT
NO

VALVE/PROCESS CONNECTION SIZE
3/4" MNPT

INLET CONNECTION SIZE
3/4" MNPT


SOLUTION TUBE SIZE
1/2"

SOLUTION TUBE ID
(PVC, CPVC, & SAF-T-SEAL ALLOY)
0.546"

SOLUTION TUBE ID
(NON-SAF-T-SEAL ALLOY)
0.622"

SOLUTION TUBE OD (ALL)
0.824"

(A) OPERATING LENGTH
2.50"

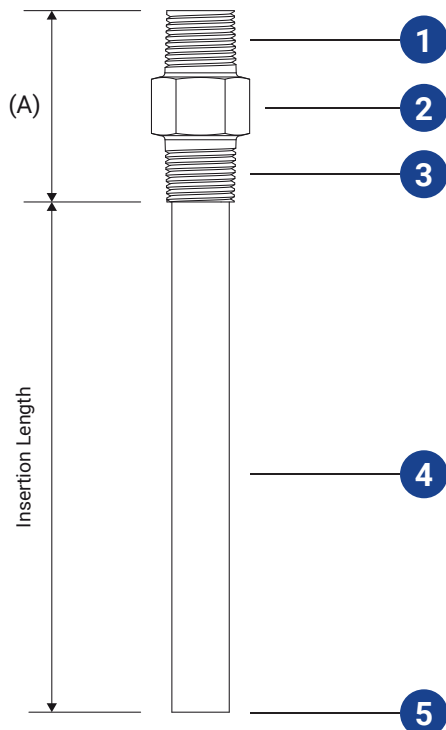

ORDERING INFORMATION

PVC and CPVC

SERIES	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION
EB-111	<input type="text"/>	<input type="text"/>	<input type="text"/>
	P = PVC C = CPVC	2 = 2" 4 = 4" 6 = 6"	0 = Standard B = 45° Bevel CV = SAF-T-Seal, FKM CE = SAF-T-Seal, EPDM

PVDF

SERIES	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION
EB-111	<input type="text"/>	<input type="text"/>	<input type="text"/>
	K = PVDF	2 = 2" 4 = 4" 6 = 6"	0 = Standard B = 45° Bevel

ALLOY

SERIES	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION
EB-111	<input type="text"/>	<input type="text"/>	<input type="text"/>
	H = HASTELLOY C276 S = 316SS A = Alloy 20	2 = 2" 4 = 4" 6 = 6" 8 = 8" 10 = 10" 12 = 12" 18 = 18" 24 = 24"	0 = Standard B = 45° Bevel CV = SAF-T-Seal, FKM CE = SAF-T-Seal, EPDM

- 1 Inlet Connection Thread
- 2 Installation Hex
- 3 Main Connection Thread
- 4 Solution Tube
- 5 Tip

