


EB-125



Standard Service Retractable Injection Quill 3/4" Valve x 3/8" Tube with Integrated Check Valve and Quick Disconnect

SPECIFICATIONS

| | |
|-------------------------------|---|
| SAFETY RATING | 150 PSI |
| CHECK VALVE | INTEGRATED SPRING LOADED BALL CHECK |
| SAF-T-SEAL TIP | OPTIONAL |
| QUICK DISCONNECT | YES |
| VALVE/PROCESS CONNECTION SIZE | 3/4" MNPT |
| INLET CONNECTION SIZE | 1/2" MNPT |
| SOLUTION TUBE SIZE | 3/8" |
| SOLUTION TUBE ID | 0.423" |
| SOLUTION TUBE OD | 0.675" |
| (A) OPERATING HEIGHT | 14.25" - BRASS 15" - STAINLESS STEEL |
| (B) VALVE/GLAND LENGTH | 6.5" - BRASS 7.25" - STAINLESS STEEL |
| EXTRACTION LENGTH | A + B + INSERTION LENGTH |

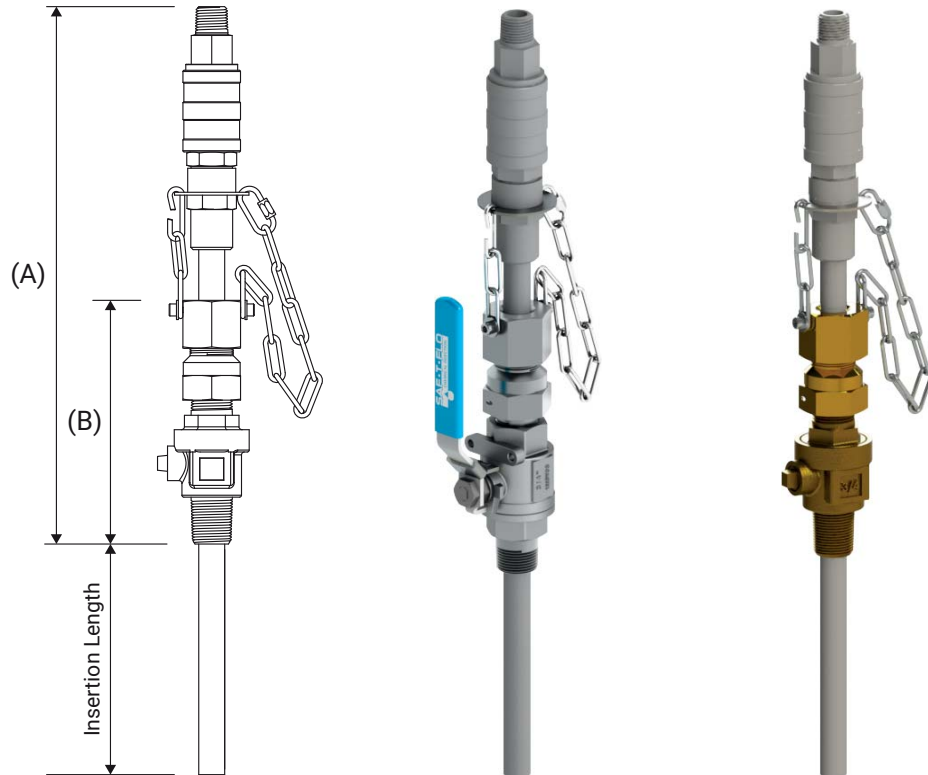

ORDERING INFORMATION

| SERIES | VALVE MATERIAL | SOLUTION TUBE MATERIAL | INSERTION LENGTH | TIP CONFIGURATION | CHECK VALVE SEAL |
|--------|----------------------------------|--------------------------|----------------------------|--|--------------------------|
| EB-125 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | B = Brass S = Stainless Steel | P = PVC | 2 = 2" 4 = 4" 6 = 6" | 0 = Standard B = 45° Bevel CV = SAF-T-Seal, FKM CE = SAF-T-Seal, EPDM | V = FKM E = EPDM |

TECH NOTES

1. Check valve spring cracking pressure is 10 psi.
2. Main connection thread type is NPT by default. CC (AWWA) also available. Consult factory for details.
3. Maximum insertion length for 3/8" PVC solution tubes is 6". PVC solution tubes are not covered by warranty when used in process flows with velocities 6 fps or greater.

