


EB-163



Standard Service Retractable Injection Quill 3/4" Valve x 3/8" Tube with Integrated Check Valve and Quick Disconnect

SPECIFICATIONS

SAFETY RATING
150 PSI
CHECK VALVE
INTEGRATED SPRING LOADED BALL CHECK
SAF-T-SEAL TIP
OPTIONAL
QUICK DISCONNECT
YES
VALVE/PROCESS CONNECTION SIZE
3/4" MNPT
INLET CONNECTION SIZE
1/2" MNPT
SOLUTION TUBE SIZE
3/8"
SOLUTION TUBE ID
0.423"
SOLUTION TUBE OD
0.675"
(A) OPERATING LENGTH
14.75"
(B) VALVE/GLAND LENGTH
7"
EXTRACTION LENGTH
21.75" + INSERTION LENGTH

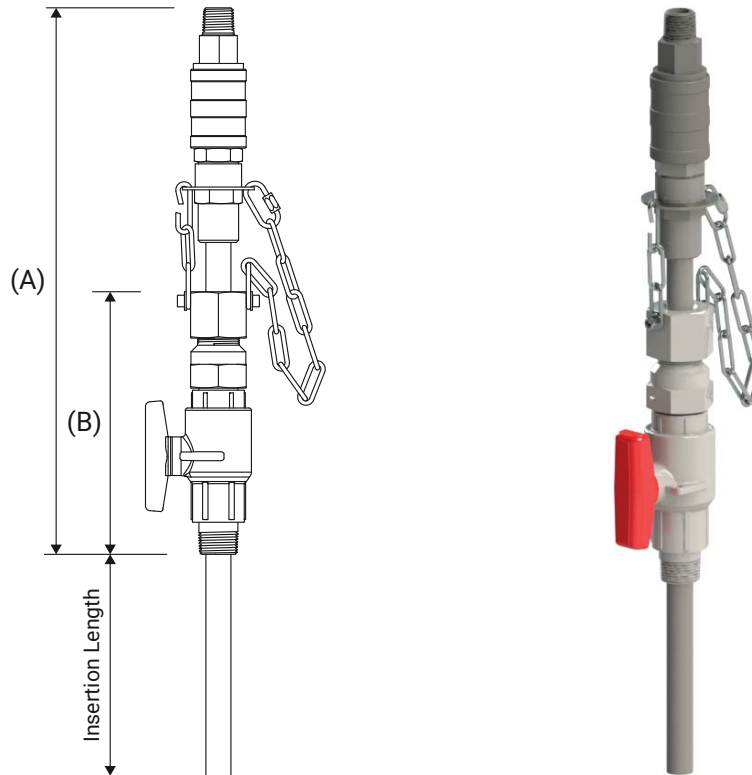

ORDERING INFORMATION

SERIES	VALVE MATERIAL	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION	CHECK VALVE SEAL
EB-163	-	-	-	-	-
	C = CPVC	P = PVC	2 = 2" 4 = 4" 6 = 6"	0 = Standard B = 45° Bevel CV = SAF-T-Seal, FKM CE = SAF-T-Seal, EPDM	V = FKM E = EPDM

TECH NOTES

1. Check valve spring cracking pressure is 10 PSI.
2. Maximum insertion length for 3/8" PVC solution tubes is 6". PVC solution tubes are not covered by warranty when used in process flows with velocities 6 fps or greater.

