


# HC-200

## High Corrosion Resistant Retractable Injection Quill 2" Valve x 1-1/2" Tube



### SPECIFICATIONS

SAFETY RATING	250 PSI
CHECK VALVE	OPTIONAL
SAF-T-SEAL TIP	N/A
QUICK DISCONNECT	N/A
VALVE/PROCESS CONNECTION SIZE	2"
INLET CONNECTION SIZE	1-1/2"
SOLUTION TUBE SIZE	1-1/2"
SOLUTION TUBE ID	1.610
SOLUTION TUBE OD	1.900"
(A) OPERATING LENGTH	17.25"
(B) VALVE/GLAND LENGTH	13"
EXTRACTION LENGTH	30.25" + INSERTION LENGTH

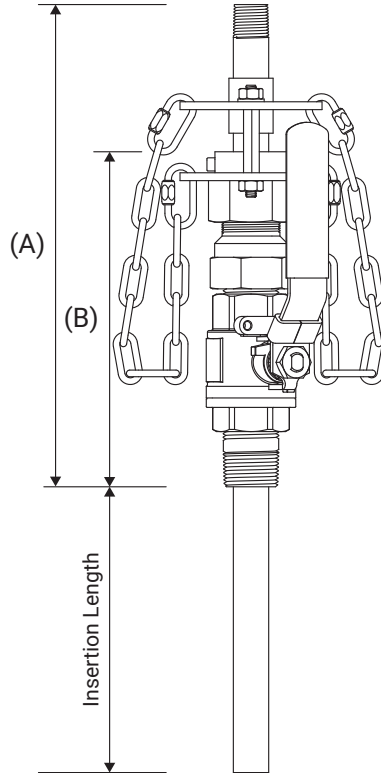

### ORDERING OPTIONS

SERIES	VALVE MATERIAL	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION	CHECK VALVE SEAL
HC-200	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	H = Alloy C A = Alloy 20 D = Duplex 2205 U = Super Duplex	H = Alloy C276 S = 316SS A = Alloy 20 T = Titanium Gr.2	2 = 2" 4 = 4" 6 = 6" 8 = 8" 10 = 10" 12 = 12" 18 = 18" 24 = 24"	0 = Standard B = 45° Bevel DH = Diffuser Holes	00 = No Check Valve 05 = Alloy, FKM 06 = Alloy, EPDM

### TECH NOTES

- When selecting alloy check valves options, the body material of the check valve is the same as the solution tube material.
- Diffuser hole configurations to be determined by customer. SAF-T-FLO does not provide recommendations regarding diffuser hole layouts.
- Materials options are subject to change. Consult factory prior to selection.
- Length dimensions may vary depending on specific materials combinations.



Please contact our Asia Pacific distributor:

# H2O Rx

SAF-T-FLO Water Services, Inc.

Phone: 0409 784 236  
Email: info@h2orx.com.au

www.h2orx.com.au  
PO Box 746, Lane Cove NSW 1595

2018-06