


HS-075

Heavy Service Retractable Injection Quill 3/4" Valve x 3/8" Tube



SPECIFICATIONS

| | |
|-----------------------------------|------------------------|
| SAFETY RATING | 250 PSI |
| CHECK VALVE | N/A |
| SAF-T-SEAL TIP | OPTIONAL |
| QUICK DISCONNECT | N/A |
| VALVE/PROCESS CONNECTION SIZE | 3/4" |
| INLET CONNECTION SIZE | 3/8" |
| SOLUTION TUBE SIZE | 3/8" |
| SOLUTION TUBE ID (W/SAF-T-SEAL) | 0.423" |
| SOLUTION TUBE ID (W/O SAF-T-SEAL) | 0.493" |
| SOLUTION TUBE OD | 0.675" |
| (A) OPERATING LENGTH | 10.5" |
| (B) VALVE/GLAND LENGTH | 7.5" |
| EXTRACTION LENGTH | 18" + INSERTION LENGTH |

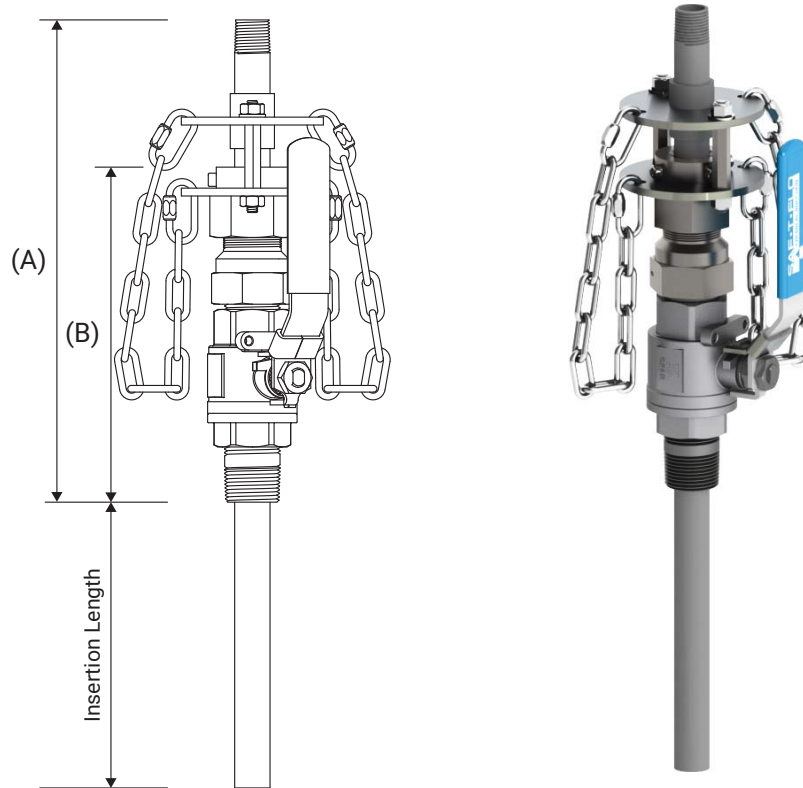

ORDERING INFORMATION

| SERIES | VALVE MATERIAL | SOLUTION TUBE MATERIAL | INSERTION LENGTH | TIP CONFIGURATION |
|--------|---------------------|--|--|--|
| HS-075 | - | - | - | - |
| | S = Stainless Steel | H = Alloy C276 S = 316SS A = Alloy 20 T = Titanium Gr.2 | 2 = 2" 4 = 4" 6 = 6" 8 = 8" 10 = 10" 12 = 12" 18 = 18" 24 = 24" | 0 = Standard B = 45° Bevel CV = SAF-T-Seal, FKM CE = SAF-T-Seal, EPDM *SAF-T-Seal tip not available with Titanium Solution Tubes |

TECH NOTES

1. Availability of Titanium solution tube material is subject to change. Please inquire prior to selecting.
2. HS-075 series covers product options that were previously contained under non-check valve equipped versions of the EB-168 series.

