

# HS-100


## Heavy Service Retractable Injection Quill

1" Valve x 1/2" Tube



### SPECIFICATIONS

SAFETY RATING	250 PSI
CHECK VALVE	N/A
SAF-T-SEAL TIP	OPTIONAL
QUICK DISCONNECT	N/A
VALVE/PROCESS CONNECTION SIZE	1"
INLET CONNECTION SIZE	1/2"
SOLUTION TUBE SIZE	1/2"
SOLUTION TUBE ID (W/SAF-T-SEAL)	0.546"
SOLUTION TUBE ID (W/O SAF-T-SEAL)	0.622"
SOLUTION TUBE OD	0.840"
(A) OPERATING LENGTH	11.5"
(B) VALVE/GLAND LENGTH	8.5"
EXTRACTION LENGTH	20" + INSERTION LENGTH

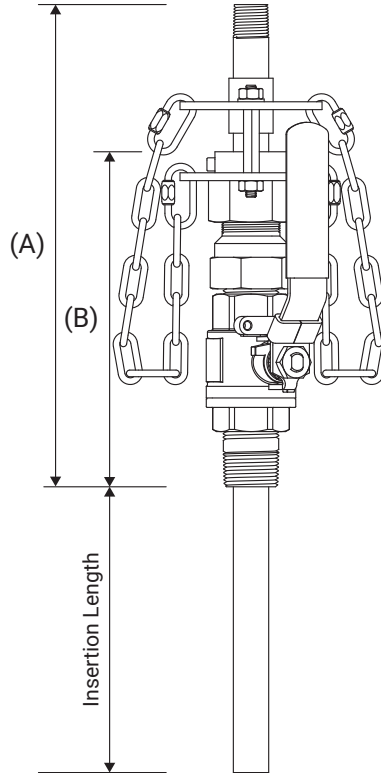

### ORDERING INFORMATION

SERIES	VALVE MATERIAL	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION
HS-100	-	-	-	-
	S = Stainless Steel	H = Alloy C276 S = 316SS A = Alloy 20 T = Titanium Gr.2	2 = 2" 4 = 4" 6 = 6" 8 = 8" 10 = 10" 12 = 12" 18 = 18" 24 = 24"	0 = Standard B = 45° Bevel CV = SAF-T-Seal, FKM CE = SAF-T-Seal, EPDM

### TECH NOTES

1. Availability of Titanium solution tube material is subject to change. Please inquire prior to selecting.
2. SAF-T-Seal tip availability with Titanium solution tube material is subject to change. Consult factory prior to selecting.
3. The HS-100 series encompasses ordering options previously offered under the EB-155 series with no check valve.

SAF-T-FLO Water Services, Inc.



Please contact our Asia Pacific distributor:

## H2O Rx

ABN: 97 217 924 685

Phone: 0409 784 236

Email: info@h2orx.com.au

[www.h2orx.com.au](http://www.h2orx.com.au)

PO Box 748, Lane Cove NSW 1595