

HS-125


Heavy Service Retractable Injection Quill

1-1/4" Valve x 3/4" Tube



SPECIFICATIONS

SAFETY RATING	250 PSI
CHECK VALVE	OPTIONAL
SAF-T-SEAL TIP	N/A
QUICK DISCONNECT	N/A
VALVE/PROCESS CONNECTION SIZE	1-1/4"
INLET CONNECTION SIZE	3/4"
SOLUTION TUBE SIZE	3/4"
SOLUTION TUBE ID	0.824"
SOLUTION TUBE OD	1.050"
(A) OPERATING LENGTH	12.5"
(B) VALVE/GLAND LENGTH	9"
EXTRACTION LENGTH	21.5" + INSERTION LENGTH

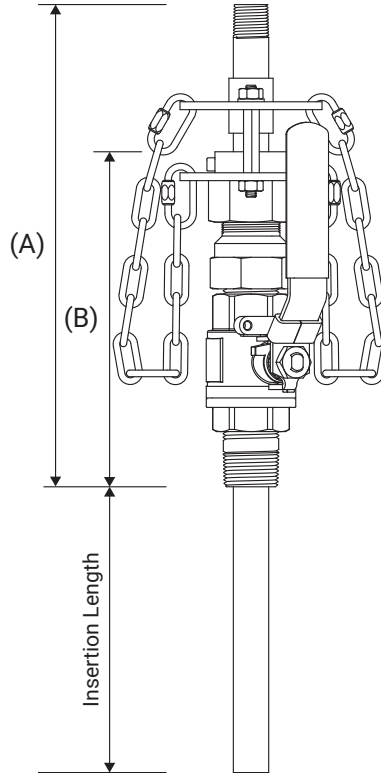

ORDERING OPTIONS

SERIES	VALVE MATERIAL	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION	CHECK VALVE SEAL
HS-125	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	S = Stainless Steel	H = Alloy C276 S = 316SS A = Alloy 20 T = Titanium Gr.2	2 = 2" 4 = 4" 6 = 6" 8 = 8" 10 = 10" 12 = 12" 18 = 18" 24 = 24"	0 = Standard B = 45° Bevel DH = Diffuser Holes	00 = No Check Valve 05 = Alloy, FKM 06 = Alloy, EPDM

TECH NOTES

- When selecting alloy check valves options, the body material of the check valve is the same as the solution tube material.
- Diffuser hole configurations to be determined by customer. SAF-T-FLO does not provide recommendations regarding diffuser hole layouts.
- HS-125 series covers the product options previously offered under the EB-147 series.

SAF-T-FLO Water Services, Inc.



Please contact our Asia Pacific distributor:

H2O Rx

ABN: 97 217 924 685

Phone: 0409 784 236

Email: info@h2orx.com.au

www.h2orx.com.au

PO Box 748, Lane Cove NSW 1595

2018-06