
## Application

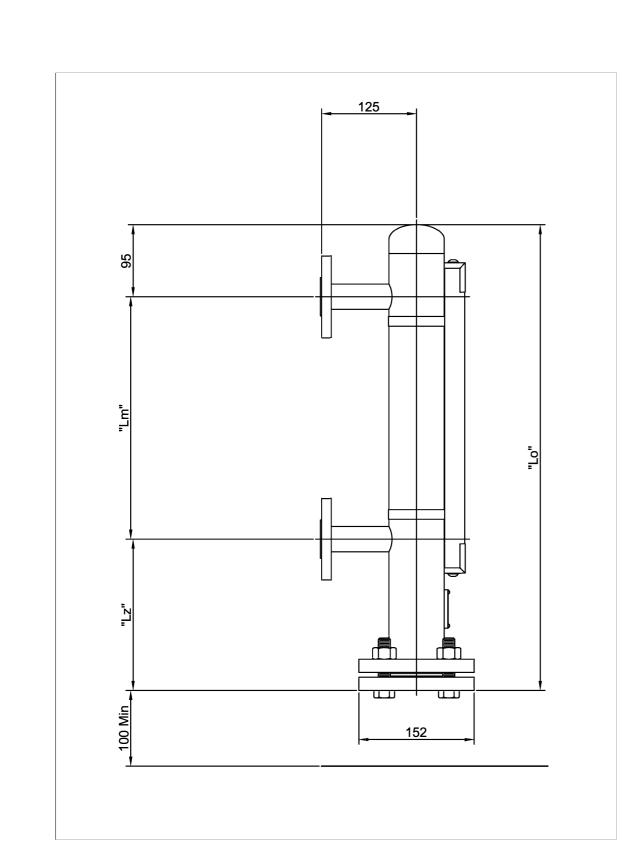

в

С

D

Е

Process Liquid	
Process Liquid Density	
Process Pressure	
Process Temperature	
Indication Length - "Lm"	
Float Cavity Length - "Lz"	
Overall Length - "Lo"	
Float chamber material	
Float Material	
Process Connection	
Gasket Material	
Customer Approval	

Notes: 1) Ir 2) M 3) H 4) C 5) A Indicator Rail is Poly Maximum operating Hydrostatic Test: 12 Operating temperatu All data subject to ch

This drawing is the exclusive property of H2O Rx and must not be copied or											H20	) Rx			Pre
reproduced in any way whatsoever without the express consent in writing of H2O Rx. The drawing is to											PO B	ox 748.			Ma
F be used only for the purpose for which it is supplied & must be												, NSW 1595 prx.com.au	DESIGNED	S Young	
returned on demand. The contents of											www.n20	orx.com.au	CHECKED		
the drawing must moreover be treated as strictly confidential &													DRAWN	S Young	
must not be disclosed to any third party without the express consent in													CHECKED		
	AMDT	AMENDMENT DETAILS	DESIGN CH	K'D DRAV	WN CH	HK'D	APP'D	DATE					APPROVED		ML
1		2	3					4	5		6 CONFIRM SCAL		IRM SCALE		

n Data
lycarbonate / Aluminium and rated to 100 deg C g pressure: 1000 kPa I250 kPa for 15 min (Certified) ture range: -20 to 60 deg C change without prior notice
Proliminan
Preliminary Magnetic Float Level Indicator
MLG-C - H2O RX.DWG