


HS-300

Heavy Service Retractable Injection Quill 3" Valve x 2-1/2" Tube



SPECIFICATIONS

SAFETY RATING	250 PSI
CHECK VALVE	OPTIONAL
SAF-T-SEAL TIP	N/A
QUICK DISCONNECT	N/A
VALVE/PROCESS CONNECTION SIZE	3"
INLET CONNECTION SIZE	2-1/2"
SOLUTION TUBE SIZE	2-1/2"
SOLUTION TUBE ID	2.469"
SOLUTION TUBE OD	2.875"
(A) OPERATING LENGTH	20.75"
(B) VALVE/GLAND LENGTH	15.5"
EXTRACTION LENGTH	36.25" + INSERTION LENGTH

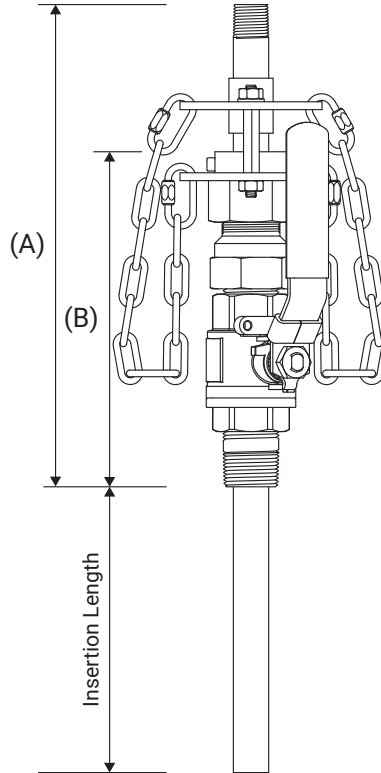

ORDERING OPTIONS

SERIES	VALVE MATERIAL	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION	CHECK VALVE SEAL
HS-300	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	S = Stainless Steel	H = Alloy C276 S = 316SS A = Alloy 20 T = Titanium Gr.2	2 = 2" 4 = 4" 6 = 6" 8 = 8" 10 = 10" 12 = 12" 18 = 18" 24 = 24"	0 = Standard B = 45° Bevel DH = Diffuser Holes	00 = No Check Valve 05 = Alloy, FKM 06 = Alloy, EPDM

TECH NOTES

- When selecting alloy check valves options, the body material of the check valve is the same as the solution tube material.
- Diffuser hole configurations to be determined by customer. SAF-T-FLO does not provide recommendations regarding diffuser hole layouts.
- The HS-300 series encompasses ordering options previously offered under the EB-151 series.

